


Specifications
34 Type Pressure Volume Type Distributors

Model	RH-342XX	RH-343XX	RH-344XX	RH-345XX
Number of outlets	2	3	4	5
Common discharge capacity	0.03 to 0.06 l/min			
Action guarantee pressure	Oil 8 ~ 12 kgf/cm ²			
Recommended viscosity	20 ~ 500 cst			

It is suitable for volume type cycle lubrication system. It can be delivered dosing oil to each lubrication points according to the measured volume type distributor. It is widely used in printing machines, packing machines, machine tool and other machine equipment and etc.


Dimensions

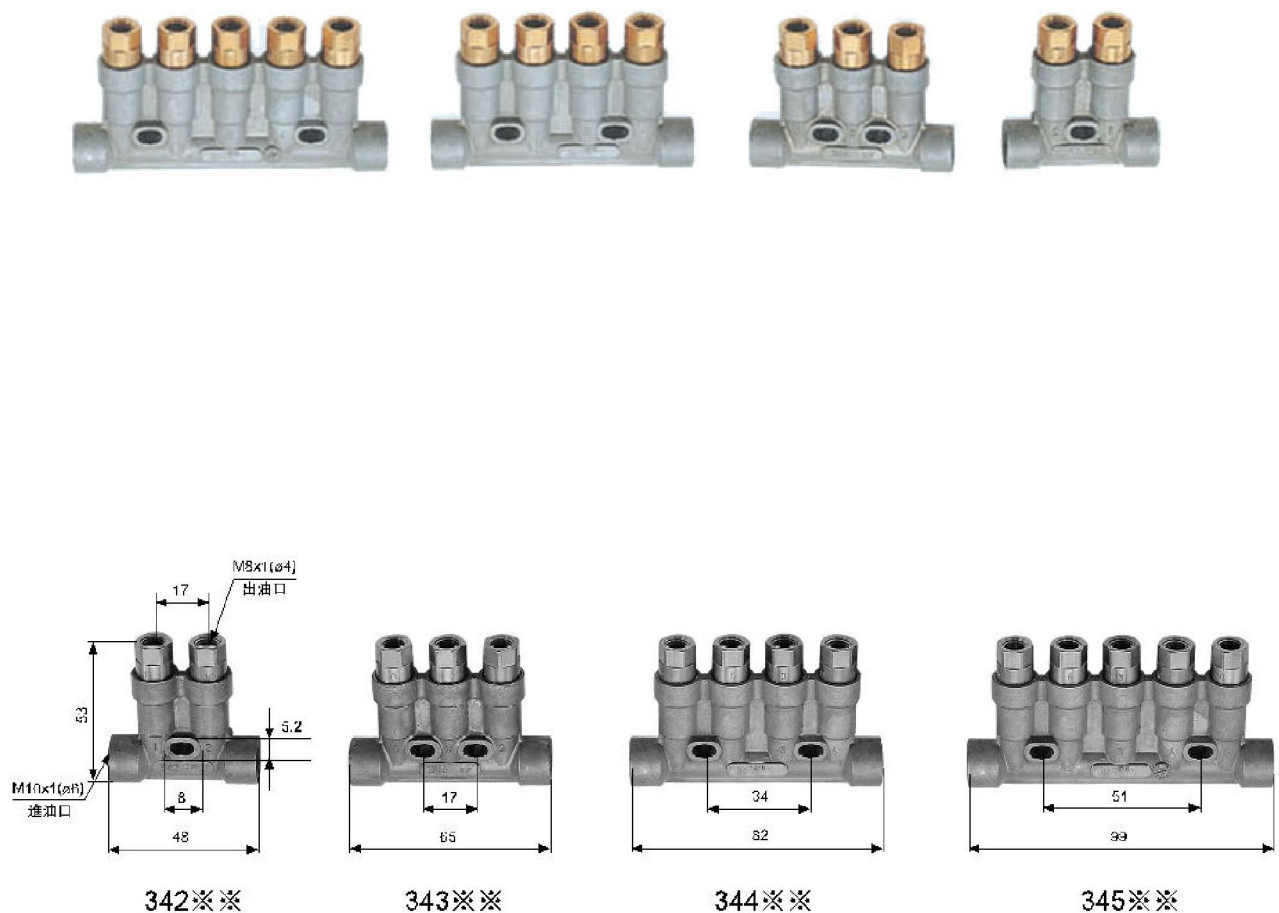

Specifications

Model	RH-342XX	RH-343XX	RH-344XX	RH-345XX
Number of outlets	2	3	4	5
Common discharge capacity	0.03 0.06 0.1 0.16			
Action guarantee pressure	Oil 8~ 12kgf/cm ²			
Recommended viscosity	20 ~ 500cst			

Guide to order

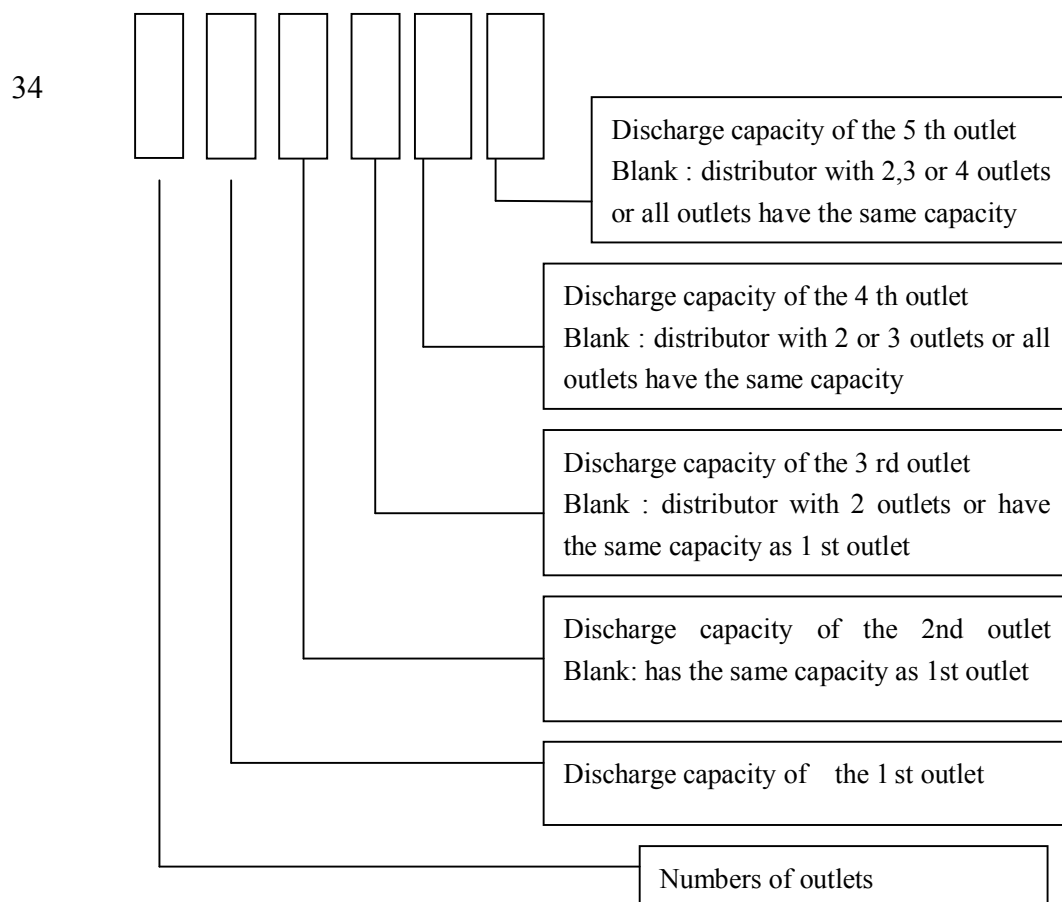

Capacity expressions:

03 means 0.03ml/time; 06 means 0.06ml/time; 10 means 0.1ml/time; 16 means 0.16ml/time.

Example 1: 3450306101616 indicates that it is a 34 type distributor with five outlets whose discharge capacity is 0.03, 0.06, 0.1, 0.16 and 0.16ml/time respectively.

Example 2: 34503 indicates that it is a 34 type distributor with five outlets and all outlets have the same capacity of 0.03ml/time.

Example 3: 3420310 indicates that it is a 34 type distributor with two outlets whose discharge capacity is 0.03, 0.1ml/time respectively.