


BM Series Cycloidal Pump

BM series cycloidal pump is a simple structure, and delivered the oil stably. It is performed good self-absorption and good high-speed characteristics. It is applicable for the lubrication system used in the low-voltage continuous or intermittent lubrication. It is specially applicable for machine tools, textile machinery, printing machinery, light machinery.

Dimensions

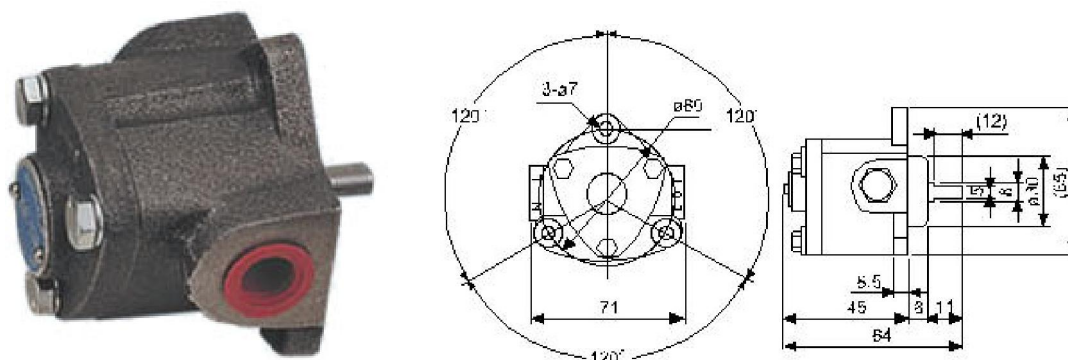


BMA Cycloidal Pump

Specifications

Model	Theoretical Discharge Capacity (c.c./rev)	Discharge Capacity (L/min)		Max. Pressure Kg/cm ²	Max. Rotary Speed	Entrance Outlet Thread	Weight Kg
		(1500rpm)	(1800rpm)				
BMA-10A	0.8	1.2	1.4	5.0	3000	PT1/8	0.55
BMA-11A	1.5	2.2	2.7	5.0	2000	PT1/8,1/4	0.55
BMA-12A	2.5	3.7	4.5	5.0	1800	PT1/4	0.55
BMA-13A	4.5	6.7	7.5	5.0	1800	PT3/8	0.55

Dimensions

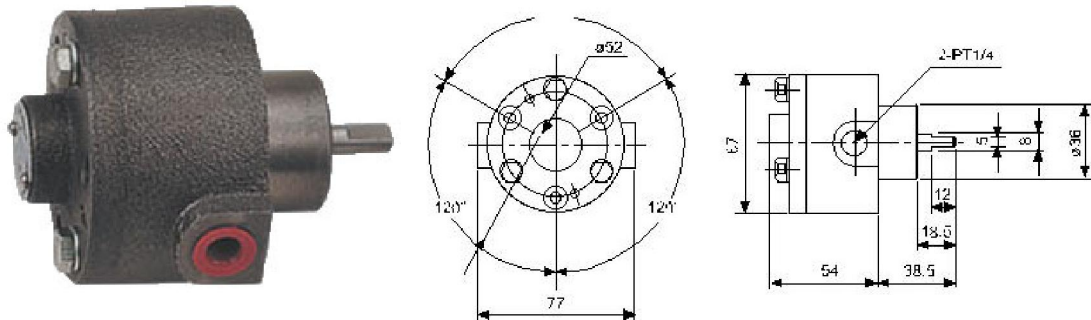

BMB Cycloidal Pump

Specifications

Model	Theoretical Discharge Capacity (c.c./rev)	Discharge Capacity (L/min)		Max. Pressure kgf/cm ²	Max. Rotary Speed	Entrance Outlet Thread	Weight kg
		(1500rpm)	(1800rpm)				
BMB-1FS	1.16	1.74	2.08	5.0	2000	PT1/4	1.0
BMB-2FS	1.8	2.7	3.24	5.0	2000	PT1/4	1.1
BMB-3FS	2.5	3.75	4.5	5.0	2000	PT1/4	1.2